


Lumination™ LED Luminaires

(GS14 Series)

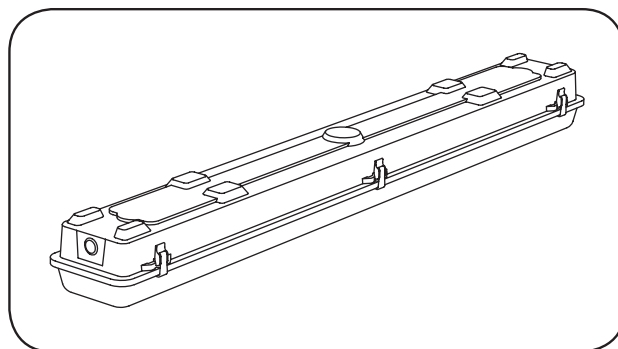

BEFORE YOU BEGIN

Read these instructions completely and carefully.

WARNING/AVERTISSEMENT

RISK OF ELECTRIC SHOCK

- Turn power off before inspection, installation or removal.
- Properly ground electrical enclosure.

RISK OF FIRE

- Follow all NEC and local codes.
- Use only UL or IEC approved wire for input/output connections. Minimum size 18 AWG (0.75mm²).
- Do not install insulation within 3 inches (76 mm) of luminaire top.

RISQUES DE DÉCHARGES ÉLECTRIQUES

- Coupez l'alimentation avant d'inspecter, installer ou déplacer le luminaire.
- Assurez-vous de correctement mettre à la terre le boîtier d'alimentation électrique.

RISQUES D'INCENDIE

- Respectez tous les codes NEC et codes locaux.
- N'utilisez que des fils approuvés par UL ou IEC pour les entrées/sorties de connexion. Taille minimum 18 AWG (0.75mm²).
- Maintenir une distance de 76 mm (3 pouces) entre le luminaire et l'isolant.

Save These Instructions

Use only in the manner intended by the manufacturer. If you have any questions, contact the manufacturer.

Prepare Electrical Wiring



Electrical Requirements

- The LED luminaire must be connected to the mains supply according to its ratings on the product label.



Grounding Instructions


- The grounding and bonding of the overall system shall be done in accordance to local electric code of the country where the luminaire is installed.





imagination at work

Components Included


- ❶ Housing base (1)
- ❷ Lens (1)
- ❸ Geartray including T8 sockets (1)
- ❹ Ground screw (1)
- ❺ Geartray clips (2)
- ❻ Lanyard (2)
- ❼ Housing latches (2)
- ❽ LED driver (1)
- ❾ LED T8 tubes (2)
- ❿ Mounting brackets (2)
- ⓫ Endplugs (2)

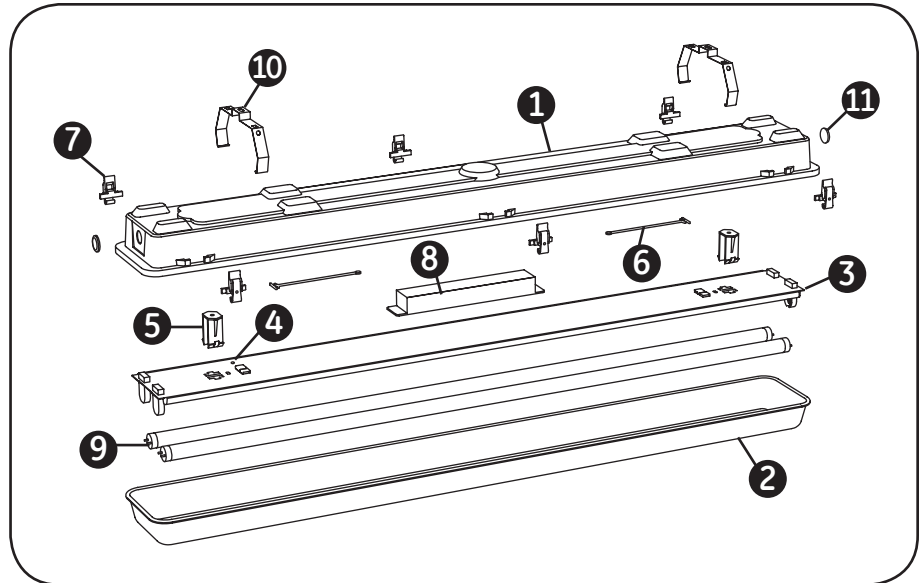


Installation

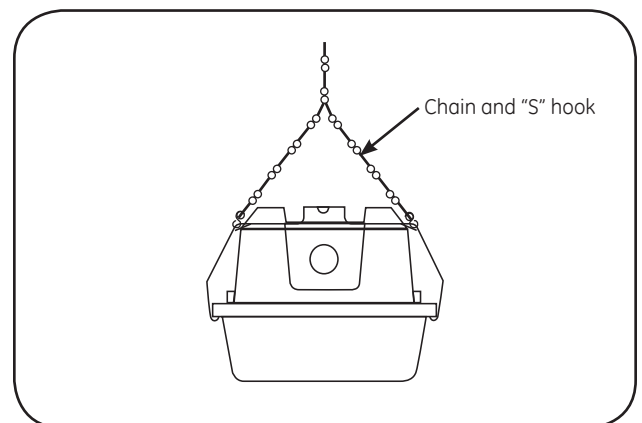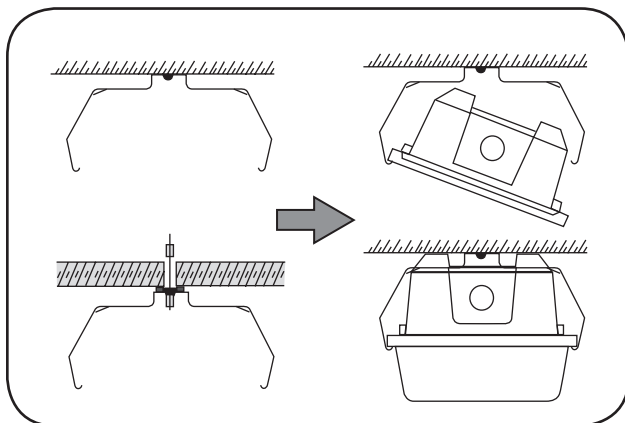


- ❶ Mount the wrap-around brackets on the ceiling or support rail using appropriate hardware. After brackets are secured in place, install one side of the housing in the bracket, then rotate up and snap the other side of the housing into bracket. Chain and "S" hook (not included) can also be used to support the brackets

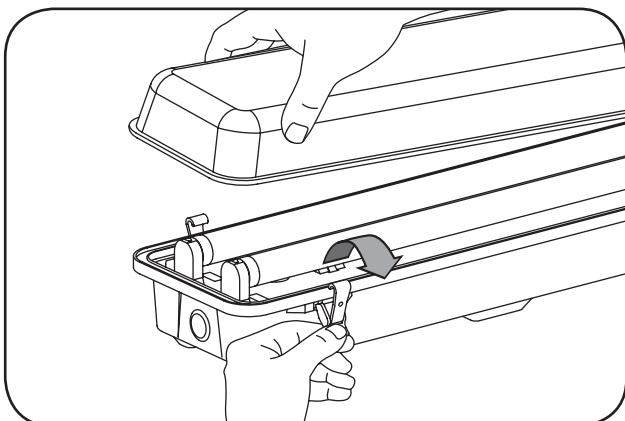


- ❷ Unfasten the 6 latches and remove the lens.

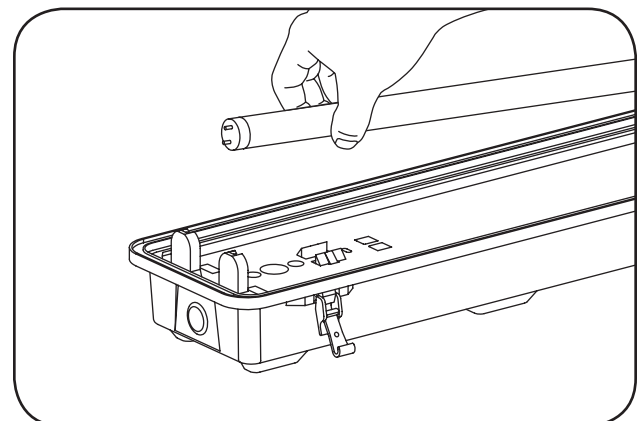


- ❸ Remove the LED T8 tubes (optional).

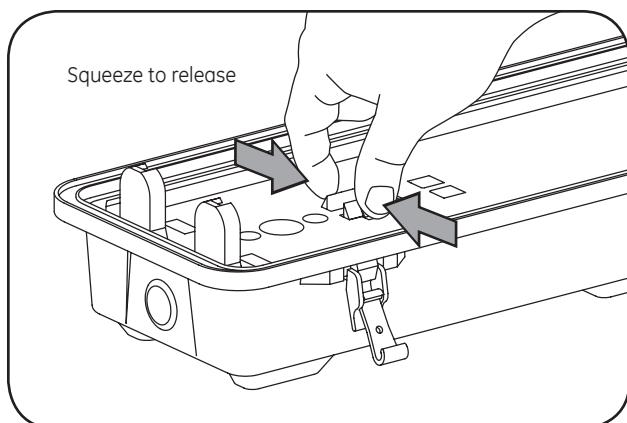


4 Squeeze the two tray clips to release the geartray.

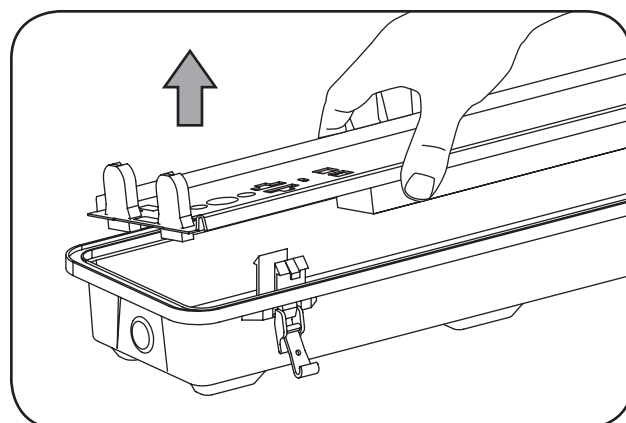


5 Lift geartray from housing.

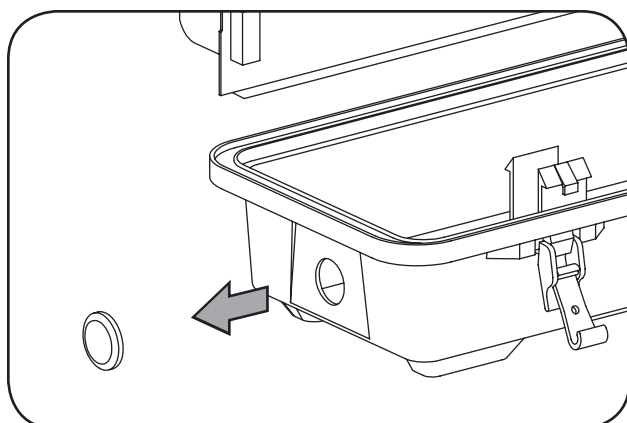


6 Remove one or two of the end plug(s) as needed to wire the unit to the AC line.

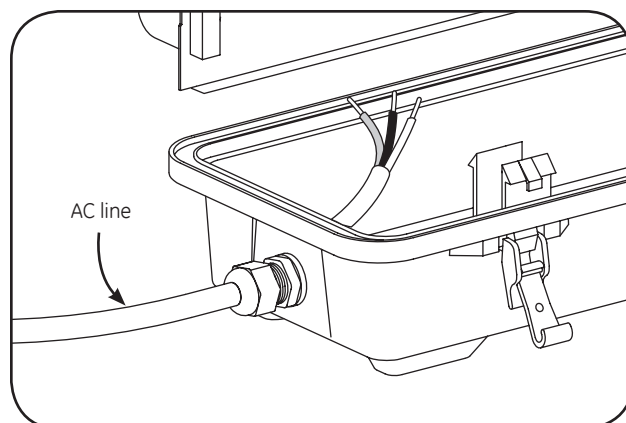


7 Install a water-tight fitting (be sure to install the fitting washer) and feed the AC line wire through the fitting.

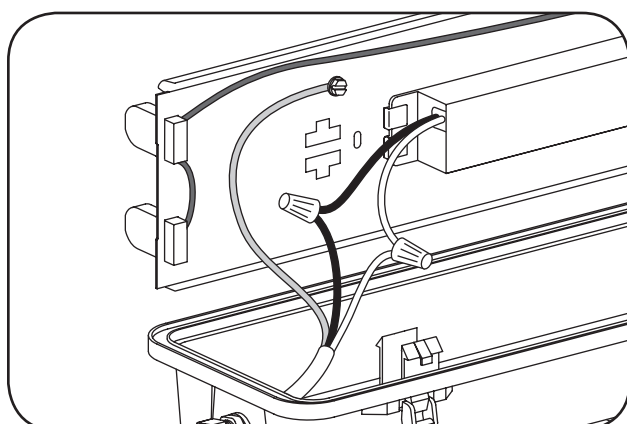


8 Connect the AC line to the black (line) and white (neutral) input wires of the LED driver using 14-18AWG twist-on wire connectors. Connect the ground wire to the green grounding screw.

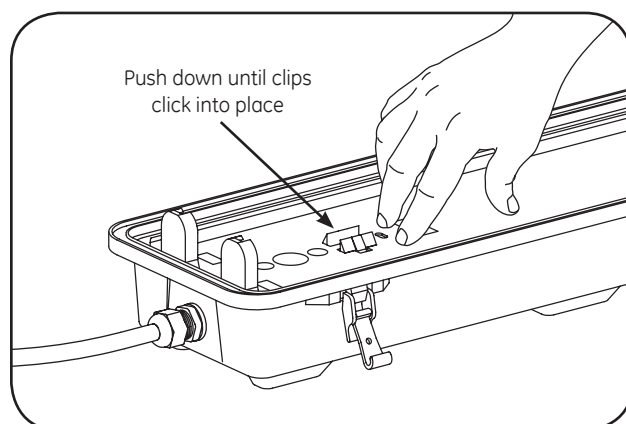

9 Reattach the geartray making sure the two tray clips are properly engaged.

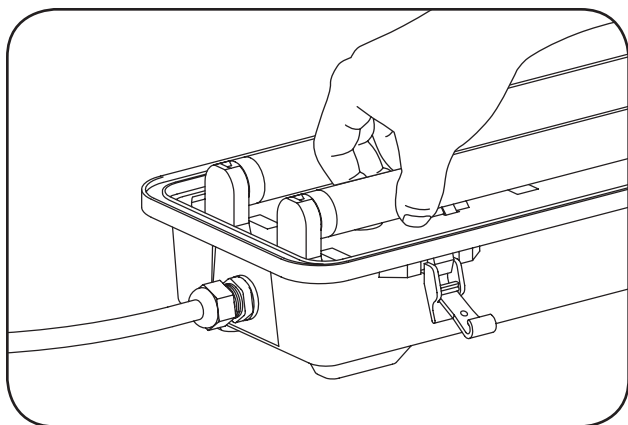


10 Reinstall the two LED T8 tubes.

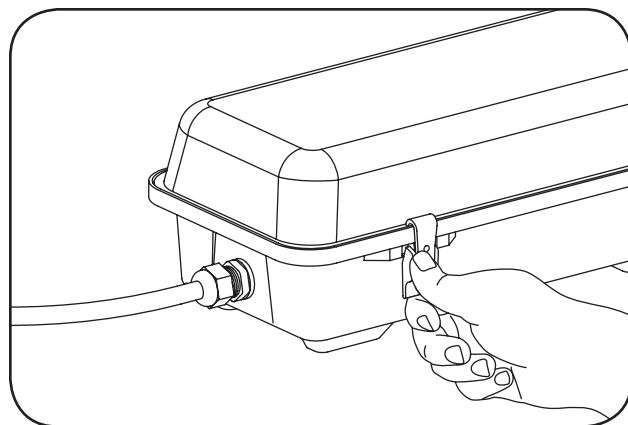

11 Reinstall the lens and secure the 6 latches.

Wiring Diagram

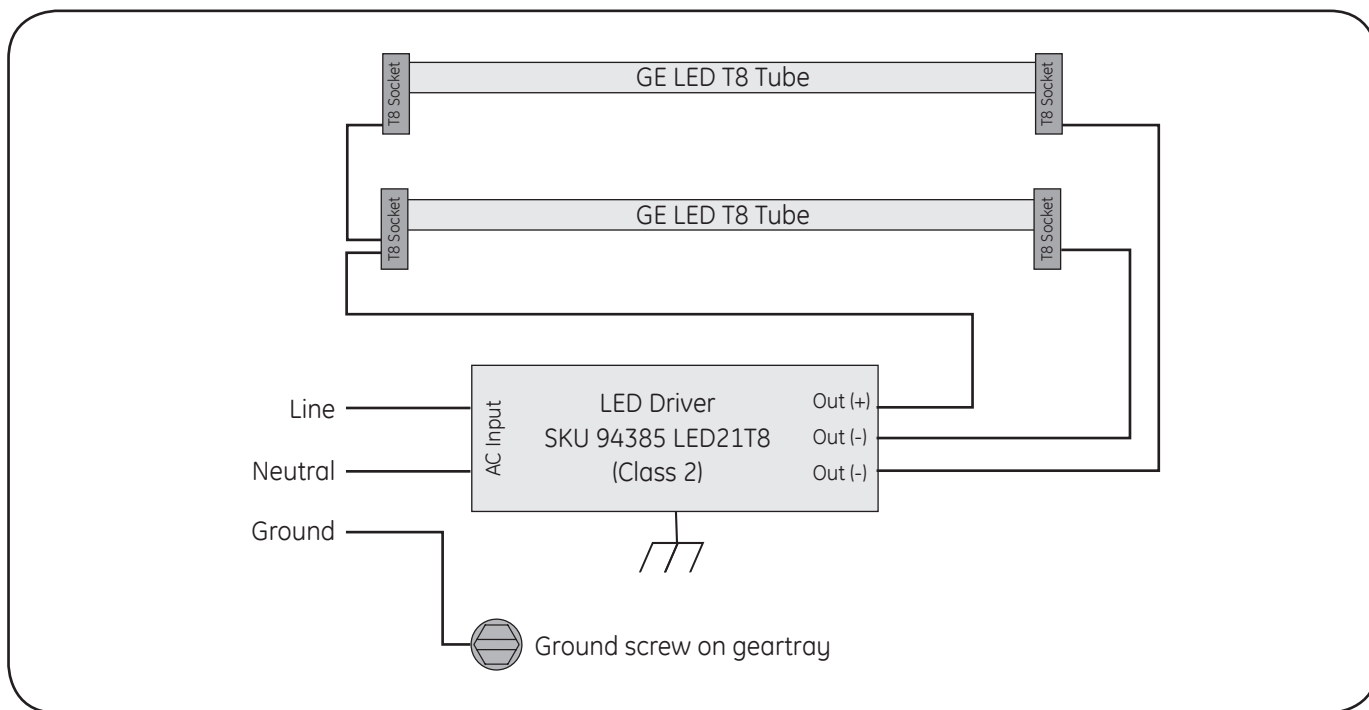

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. This Class [A] RFLD complies with the Canadian standard ICES-003. Ce DEFR de la classe [A] est conforme à la NMB-003 du Canada.

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.



GE Lighting • 1-888-MY-GE-LED (1-888-69-43-533) • www.gelighting.com

GE Lighting Solutions, LLC is a subsidiary of the General Electric Company. The GE brand, logo, and Lumination are trademarks of the General Electric Company.
© 2014 GE Lighting Solutions, LLC. Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions.

IND121-070914